ADVANCED
NETWORK DEVICES

AND-STROBE-KIT-1
AND Strobe Kit

Overview

Provide an additional mode of emergency notification or alert messaging by connecting the AND Strobe KIT (AND-STROBE-KIT-1) to a compatible AND IP endpoint.

Once connected to an AND IP endpoint, the AND-STROBE-KIT-1 easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.

Contact Tech Support if you plan to connect the strobe to the IPSIGNL-RWB. This requires the AND-PIA-2D, which will be provided at no additional cost. Contact tech@anetd.com or 847-463-2237

Description

ANALOG INTEGRATION

Activate strobe by connecting to contact closure, call button, existing security system, etc.

SOFTWARE

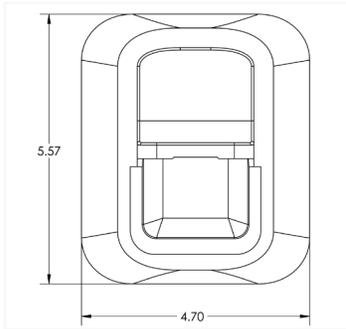ClockWise Campus software included. Compatible with approved third-party software.
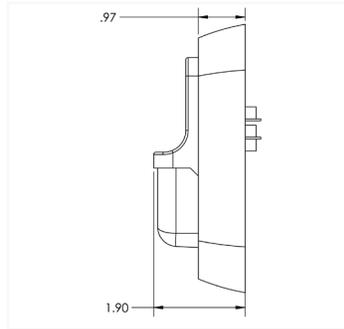
SIP INTEGRATION

SIP ring detection alert.

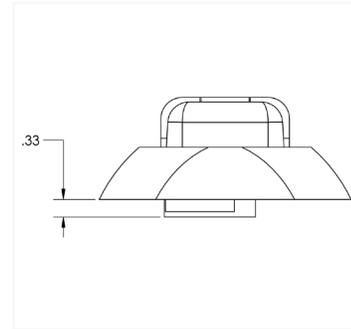| Solutions	Additional Features	Compatible Devices		Accessories
• Code alerts • Emergency notification • Security monitoring	• Built-in web server • Full multicast and broadcast support	**HD IP Display** • IPCSHD-MB **IP Speaker with HD Display** • IPSWDHD-MW **Large IP Signboard** • IPSIGNL-RWB **Zone Controller** • ZONEC2	**IP Speaker with Display** • IPSWD-RWB **Small IP Display** • IPCSS-RWB / MB **Large IP Display** • IPCSL-RWB **Double-Sided IP Display** • IPCDS-RWB-U	• Standard junction box required for mounting (not included). • Requires 18-22 AWG stranded or solid core wire pair (not included). **Color Lenses from System Sensor** • Blue, Yellow, Green, Red (not included)

Dimensions

Front

Side

Top

Specifications

Due to continual product development, specifications are subject to change without notice.

Power	Powered by connected AND device
Ethernet I/F	10/100 Mbps
Flash Rate	1 Flash per second
Luminous Intensity	15/75 Candela
Humidity Range	10 to 93% Non-condensing
Operating Temperature	32˚ TO 120˚ F (0˚ TO 49˚ C)
Dimensions	4.65" W x 5" H x 2.75"D
Weight	2 lbs (0.91 kg)
Warranty	2 Year Limited