

# ZONE-LO

Zone Line-Out Controller



## Overview

The Zone Line-Out Controller (ZONE-LO) offers the perfect solution for organizations simply requiring the broadcast of audio, via the network, to existing traditional speakers. Connect the ZONE-LO to an amplifier. This will integrate a group of speakers, connected to that amplifier, to the network.

The ZONE-LO also integrates with approved 3rd party software and includes ClockWise Campus software with purchase.

## Description



### PERIPHERAL INTEGRATION

Connect an existing amplifier.



### SOFTWARE

ClockWise Campus software included.  
Compatible with approved third-party software.




### SIP INTEGRATION

Call to page analog speakers.


Solutions	Additional Features	Compatible Peripherals
<ul style="list-style-type: none"> <li>• Paging</li> <li>• Bell scheduling</li> <li>• Code alerts</li> <li>• Emergency notification</li> <li>• Music streaming</li> </ul>	<ul style="list-style-type: none"> <li>• Built-in web server</li> <li>• Full multicast and broadcast support</li> <li>• Requires Cat5 or Cat6 cable</li> </ul>	<ul style="list-style-type: none"> <li>• N/A</li> </ul>

## Dimensions


(Dimensions are subject to change)




Front



Back



Side

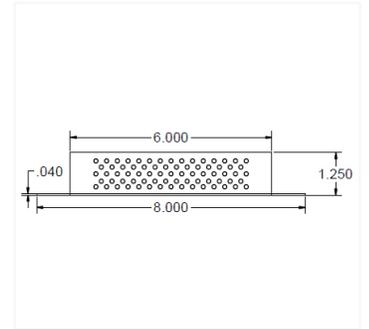

Top

## Specifications

Due to continual product development, specifications are subject to change without notice.

Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W
Ethernet I/F	10/100 Mbps
Audio Power	8 W / 16 W
Speaker Output	8-ohm
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	N/A
Audio Interface	Unbalanced line level audio out Line out signal level up to 2 Vpp
Operating Temperature	0° TO 50° C (34° TO 122° F)
Dimensions	8.0" W x 1.25" H x 6.0" D
Weight	1 lb 7 oz (652 g)
Warranty	2 Year Limited

