

# IPCSHD-DS-MB

Double-Sided HD IP Display



## Overview

Engage and capture attention in corridors and hallways using the PoE+ Double-Sided HD IP Display with matte black finish (Universal Mount). Display countdown timers, custom graphics and announcements using the high-resolution LCD display, RGB flasher, and two 4 inch speakers that can be seen and heard from both sides of the device.

The universal mount provides the option to mount from the wall or ceiling. The IPCSHD-DS-MB easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.


## Description

 <p><b>DISPLAY</b></p> <p>1920 x 720 high resolution full-color LCD screen. Angled display to reduce glare.</p>	 <p><b>MICROPHONE</b></p> <p>Hands-free two-way intercom.</p>	 <p><b>FLASHER</b></p> <p>RGB flashing LED indicator. Customize for additional visual messaging in any color.</p>	 <p><b>AUDIO</b></p> <p>Two 4" high-efficiency speakers. Audio coverage up to 600ft<sup>2</sup> on each side.</p>
 <p><b>PERIPHERAL INTEGRATION</b></p> <p>N/A</p>	 <p><b>SOFTWARE</b></p> <p>ClockWise Campus software included. Compatible with approved third-party software.</p>	 <p><b>SIP INTEGRATION</b></p> <p>SIP-enabled. Easily interfaces with VoIP / SIP phone systems.</p>	 <p><b>LIGHT SENSOR</b></p> <p>Auto-dimming display.</p>


Solutions	Additional Features	Compatible Peripherals
<ul style="list-style-type: none"> <li>• Paging</li> <li>• Intercom</li> <li>• Bell scheduling</li> <li>• Code alerts</li> <li>• Emergency notification</li> <li>• Music streaming</li> </ul>	<ul style="list-style-type: none"> <li>• Built-in web server</li> <li>• Full multicast and broadcast support</li> <li>• Requires Cat5 or Cat6 cable</li> <li>• Atomic time</li> </ul>	<ul style="list-style-type: none"> <li>• N/A</li> </ul>

## Dimensions


(Dimensions are subject to change)

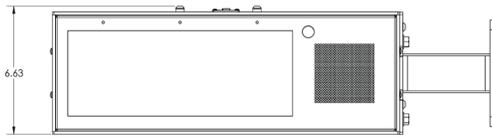


Wall Mount Front

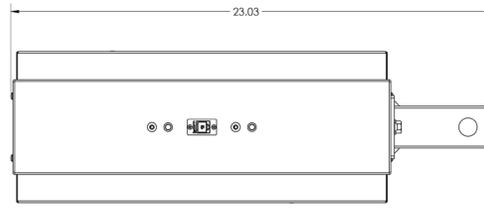


Wall Mount Top

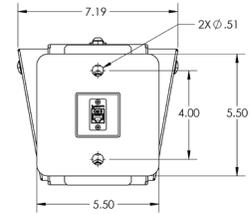

Wall Mount Side

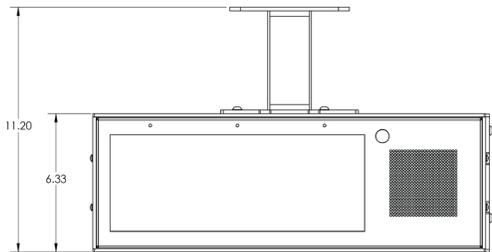

Ceiling Mount Front

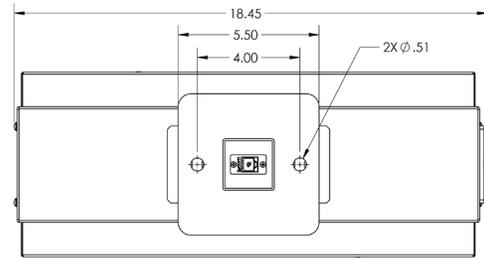

Ceiling Mount Top



Ceiling Mount Side

## Specifications

Due to continual product development, specifications are subject to change without notice.

Power Input	PoE+ (IEEE802.3at) 30.0W
Ethernet I/F	10/100/1000 Mbps
Speaker Size	4"
Frequency Response	150 Hz - 17 kHz
Audio Payload Types	G711, A-law and $\mu$ -law
Average Sensitivity	94dB, 1W / 1 M
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD
General Purpose Interface	N/A
Audio Interface	N/A
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	Wall Mount: 22.03" W x 6.63" H x 7.19" D (including mount) Ceiling Mount: 18.45" W x 11.20" H x 7.19" D (including mount)
Weight	22 lbs (9.98 kg)
Warranty	2 Year Limited

