


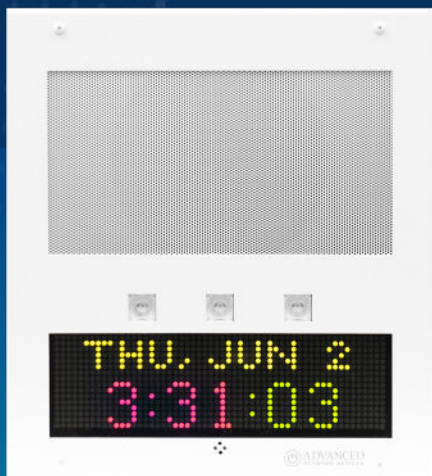

IPSWD-RWB

IP Speaker with Display

Overview

Keep your facility notified and on schedule with the PoE IP Speaker with Display. Capture attention in any environment using multi-colored text, pixel graphics, 8 inch speaker, and LED flashers. Required surface mount (IPS-SM1) or flush mount (IPS-FM1) enclosure sold separately.

The IPSWD-RWB is typically installed in classrooms or any average sized room, easily integrates with VoIP phone systems, 3rd party emergency software, and includes ClockWise Campus software with purchase.

Description

2:46 PM
42

DISPLAY

Multi-color LED scrolling text and pixel graphics. 1-line or 2-line display.



MICROPHONE

Hands-free two-way intercom.



FLASHERS

One red, one white, one blue LED flasher. Individually controlled.



AUDIO

8" high-efficiency speaker audio coverage up to 600ft².



PERIPHERAL INTEGRATION

Connect a strobe, motion sensor, electronic lock, call button, etc.



SOFTWARE

ClockWise Campus software included. Compatible with approved third-party software.



SIP INTEGRATION

SIP-enabled. Easily interfaces with VoIP / SIP phone systems.




LIGHT SENSOR

Auto-dimming display.


Solutions	Additional Features	Compatible Peripherals	Accessories
- Paging - Intercom - Bell scheduling - Code alerts - Emergency notification - Access control - Security monitoring - Music streaming	- Built-in web server - Full multicast and broadcast support - Requires Cat5 or Cat6 cable - Atomic time	Strobe Kit - AND-STROBE-KIT-1 *Requires AND-PIA-2 for MAC address 20:46:F9:09:xx:xx or lower Call Button Kit - BTN-KIT-MIC-ND for MAC address 20:46:F9:0B:xx:xx or higher - AND-BTN-KIT-1 *Requires AND-PIA-2 for MAC address 20:46:F9:09:xx:xx or lower Peripheral Interface Adapter Board - AND-PIA-2	Enclosure is <u>required</u> and sold separately. Surface Mount - IPS-SM1 - or Flush Mount - IPS-FM1

Dimensions


(Dimensions are subject to change)

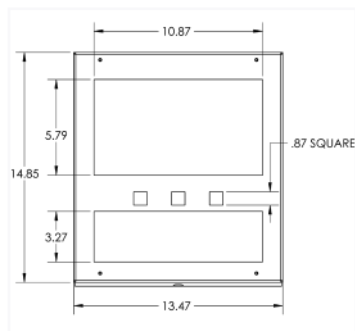


Front

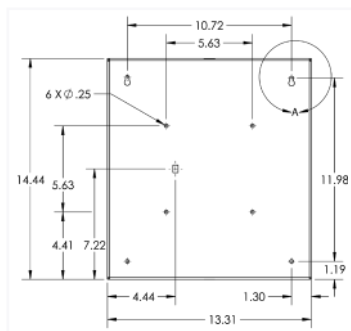

Back



Side

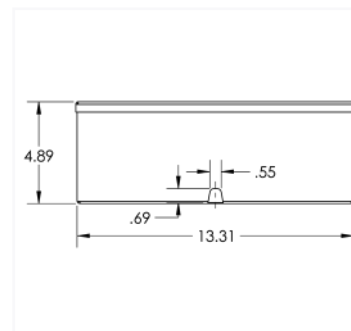

Top

Specifications

Due to continual product development, specifications are subject to change without notice.

Power Input	PoE (IEEE802.3af) 15.4 W or PoE+ (IEEE802.3at) 30.0 W	
Ethernet I/F	10/100 Mbps	
Speaker Size	8"	
Audio Power	8 W / 16 W	
Frequency Response	60 Hz - 17 kHz	
Audio Payload Types	G711, A-law and μ -law	
Average Sensitivity	95dB, 1W / 1 M	
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, SLP, TFTP, NTP, SNMPV1 & SNMPV2c, DHCP, IGMP, ICMP, TCP/IP, LLDP-MED, UDP, MDNS & MDNS-SD	
General Purpose Interface	MAC address 20:46:F9:0B:xx:xx or higher 2 GPI: 1 via RJ-11, 1 via Cable Harness 1 GPO 17.5 VDC	MAC address 20:46:F9:09:xx:xx or lower 2 GPI via AND-PIA-2 1 GPO: Contact Closure or 12 VDC / 15 VDC via AND-PIA-2
	MAC address 20:46:F9:0B:xx:xx or higher N/A	MAC address 20:46:F9:09:xx:xx or lower Analog Line Out via AND-PIA-2 Analog Line In via AND-PIA-2
Audio Interface		
Operating Temperature	14° TO 122° F (-10° TO 50° C)	
Dimensions	13.47" W x 14.85" H x 4.89" D	
Weight	10.5 lbs (4.7 kg)	
Warranty	2 Year Limited	

