

PART NUMBER
IPHORN 60X40

CATEGORY
SPEAKERS

Features

Audio

High-efficiency horn.

Outdoor Applications

Ingress protection IP66 rating
(IEC standard 60529).

Solid particle protection and
liquid ingress protection.

Software

ClockWise Campus software included.
Compatible with approved
third-party software.

SIP Integration

SIP-enabled.
Easily interfaces with
VoIP / SIP phone systems.




Product Overview

Broadcast announcements outdoors or in a large room with the PoE IP Horn 60x40. It functions as a durable, weather-resistant, surface-mount horn that extends the reach of audio communications to outdoor environments.

The IP Horn 60x40 easily integrates with VoIP phone systems, approved 3rd party software, and includes ClockWise Campus software with purchase.

Dimensions

(Dimensions are subject to change.)

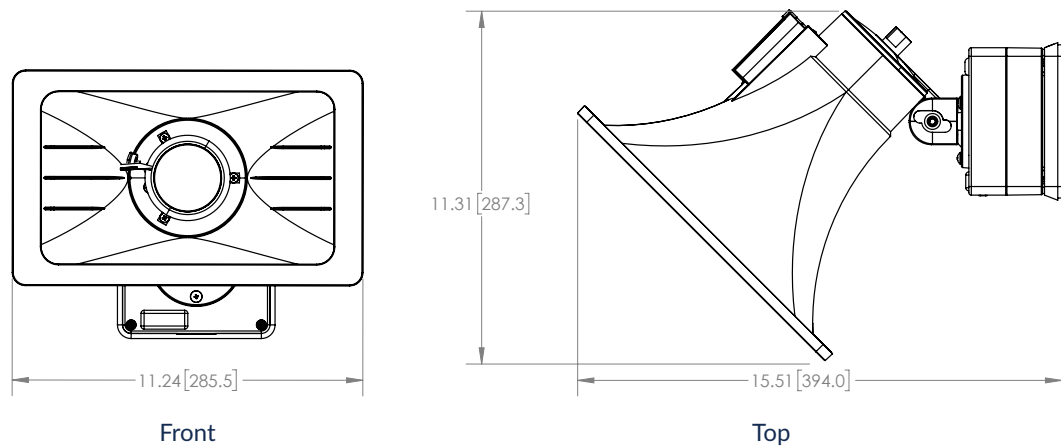

Category	Specifications
Power Input	PoE (IEEE 802.3af) / PoE+ (IEEE 802.3at)
Ethernet I/F	10/100 Mbps
Audio Power	8 W / 16 W
Frequency Response	350 – 9,000 Hz (- 10 dB)
Audio Payload Types	G.711, A-law and μ -law, PCM
Average Sensitivity	107 dBA $\pm$ 3 dB 1m/1W (1 kHz) at 1.0K, 1.5K, 2K, Hz-Avg
Supported Protocols	SIP, IPv4, IPv6, 802.1X, HTTP, DHCP, NTP, SNMP, TCP/IP, LLDP-MED, UDP, MDNS
Operating Temperature	14° TO 122° F (-10° TO 50° C)
Dimensions	11.25" W x 12" H x 16" D
Weight	4.25 lbs (4.54 kg)
Warranty	6 Year Limited*

(Due to continual product development, specifications are subject to change without notice.)

*Applies to eligible ANetD hardware devices purchased on or after February 1, 2026. See warranty for details.



Contact Us

 847.463.2236

 sales@anetd.com

 3820 N Ventura Drive
Arlington Heights, IL 60004

 anetd.com

